

THE PLATINUM PACKAGING GROUP

PLAT*Machinery* Tray Sealers

30 Series

DT30M

Performance Output

Units sealed at speeds
up to **30 cpm**



Applications

fresh, frozen, & prepared foods
produce
consumer goods

Style

drum seal

Film Types

polypropylene
polyester
perforated

Technical Specifications

Performance Output

Up to 30 cpm

Dimensions

Machine Size (Approx.)

Length 74"

Width 26"

Height 56"

Infeed Conveyor

Length 22"

Height above floor 36"

Product Discharge

Stainless steel ramps

Weight / Construction

400 lbs base machine

Frame construction:

#11 ga. 304 St. St. & 3/8" X 7" 6061 Alum.

Utility Connection

Electric

110-120V, 1PH, 60Hz

Tray Carriers

3/4" Th. 6061 Alum.

Tool & Jig Plate - Anodized.

Packaging Specifications

Maximum Package Size

Length 10"

Width 10.5"

Height 3"

Wrapping Material

Max. Film Width 10.5"

Max. Film Roll Diameter 13"

Heated Seal Drum

Coated non-stick Aluminum

Consistent heat transfer

Solid state heat controller

Quick recovery

Standard Features

Solid state heat control

Left-to-right product flow,
facing the control panel

Quick-change tray holders

Stainless steel covers

Casters

Food contact approved
conveyor

Optional Features

Gas Purge

Film perforating roll assembly

Automatic air opening and
closing seal drum (requires
compressed air, 1CFM @ 80PSI)

Shallow tray lift assembly


Wash-down drive motor

THE PLATINUM PACKAGING GROUP

PLAT *Machinery* Tray Sealers

30 Series

Portable, Compact, Sanitary

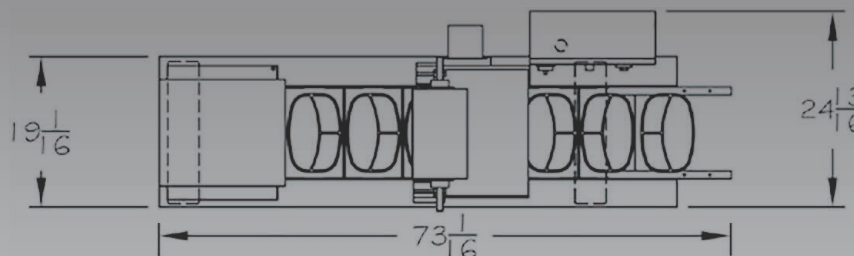

Overview

The 30 Series is our most compact automatic tray sealer, packing performance into a small foot print. This model is ideal for applications requiring high output from a small physical space.

The DT30M accommodates film widths up to 10.5". This versatile tray seal handles a wide range of container sizes with the pop-out interchangeable tray pallets. The tool-free, quick change tray pallets are manufactured from 3/4" aluminum plate! Utilize the DT30M's dual-lane capacity to seal smaller containers two at a time. The seal drum temperature is continually monitored by a thermocouple and consistent temperature is maintained with a solid state controller.

Casters and a 110-volt electrical supply make the DT30M portable and flexible in operating the machine in a convenient location. The stainless steel and aluminum construction is ideal for strict sanitary applications.



Quick-change tray holders | For processing various container sizes

Standard Features


Model	Drive	Electric Supply	CPM	Seal Style Drum	Food Safe	Feed Space
DT30M	mechanical (M)	1/8 HP DC, 110-120V, 1PH, 60Hz	30	●	●	22"

Optional Accessories

- Lazy Susan (rotary turn table)
- Adjustable side table
- Spare parts kit



Lazy Susan With Side Tables

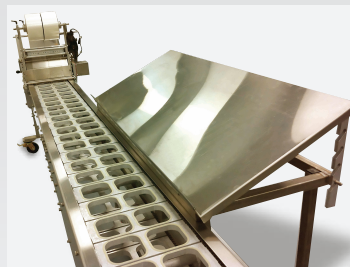

Roll Up Or Attached Side Tables

THE PLATINUM PACKAGING GROUP

tel: (562) 630-6700

7627 Somerset Blvd., Paramount, CA 90723

sales@platinumpkggroup.com